

## Cast Iron Sewage Pumps

**SWW05001TPK** | 1/2 HP | 9000 GPH

**SWW07501TPK** | 3/4 HP | 14000 GPH



- Heavy-duty cast iron construction maximizes pump life
- Piggyback tethered float switch for automatic or manual operation
- 2" Quick Connect Fitting allows for installation in seconds
- Non-clog vortex impeller handles up to 2" solids
- Energy-efficient PSC motor with automatic reset thermal overload protection
- Ball bearings for quiet operation
- Oil-filled motor provides maximum heat dissipation and permanent lubrication
- Graphite and ceramic mechanical sealed motor for long life




### Performance

Model No.	HP	Discharge Flow (GPH)					
		0'	5'	10'	15'	20'	Max. lift
<b>SWW05001TPK</b>	1/2	9000	7320	5400	2700	0	20'
<b>SWW07501TPK</b>	3/4	14000	11700	9600	6600	3900	23'


Application	
Submersible sewage pump is designed for pumping sewage, effluent, wastewater or flooded water with up to two-inch solids.	
Voltage	115
Hertz	60
Phase	Single
RPM	1800RPM
Motor type	Permanent Split Capacitor(PSC)
Insulation	Class B
Circuit requirements	15 AMP
Duty rating	Continuous*
Shaft seal	Mechanical seal
Motor Shaft	Stainless steel
Upper motor bearing	Ball bearing
Lower motor bearing	Ball bearing
Cooling	Oil cooled
Motor protection	Auto reset thermal overload protector
Pump Specifications	
Discharge size	2" FNPT (with 2" Quick Connect Fitting)
Cord Length	20'
Cord type	SJTW 16AWG/3C, UL list
Pump Housing	Cast iron
Pump Base	Cast iron
Impeller material	Reinforced thermoplastic
Gasket	Rubber
Solids handling	2"spherical
Liquid temp.range	32°-131°F
Operation	Automatic
Fasteners	Stainless steel
Automatic Switch Specifications	
Type	Tethered float switch
Switch on point	16.5"
Switch off point	7.5"
Material	Reinforced thermoplastic
Cord Length	20'
Cord type	SJTW 16AWG/3C, UL list
Sump basin	18"

## Performance

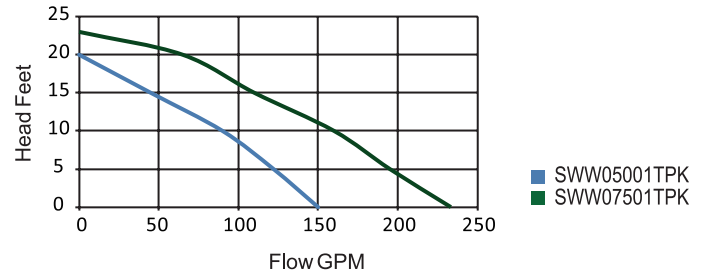

Model	HP	Amps	Discharge Height(ft)	0	5	10	15	20
				GPM	GPH	GPM	GPH	GPM
SWW05001TPK	1/2	9.5	GPM	150	122	90	45	0
				GPH	9000	7320	5400	2700
SWW07501TPK	3/4	10.5	GPM	233	195	160	110	65
				GPH	14000	11700	9600	6600

## Dimensions

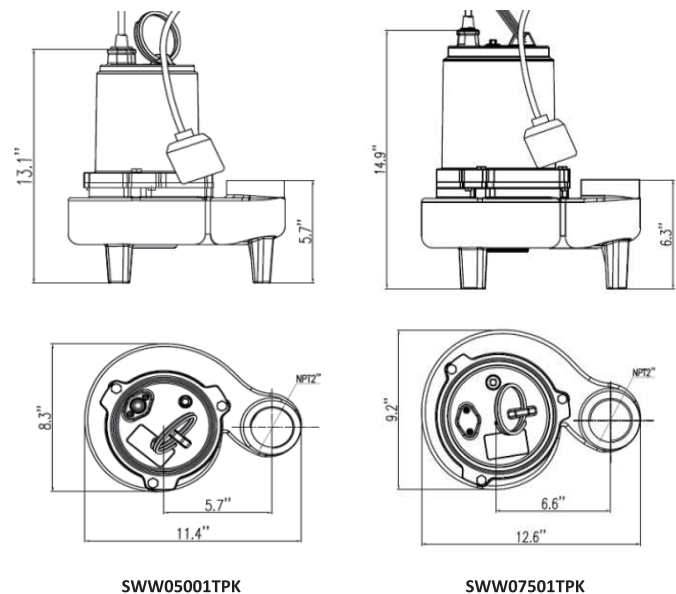

SWW05001TPK

SWW07501TPK